


OPTION 1: CUP INSTALLATION INSTRUCTIONS

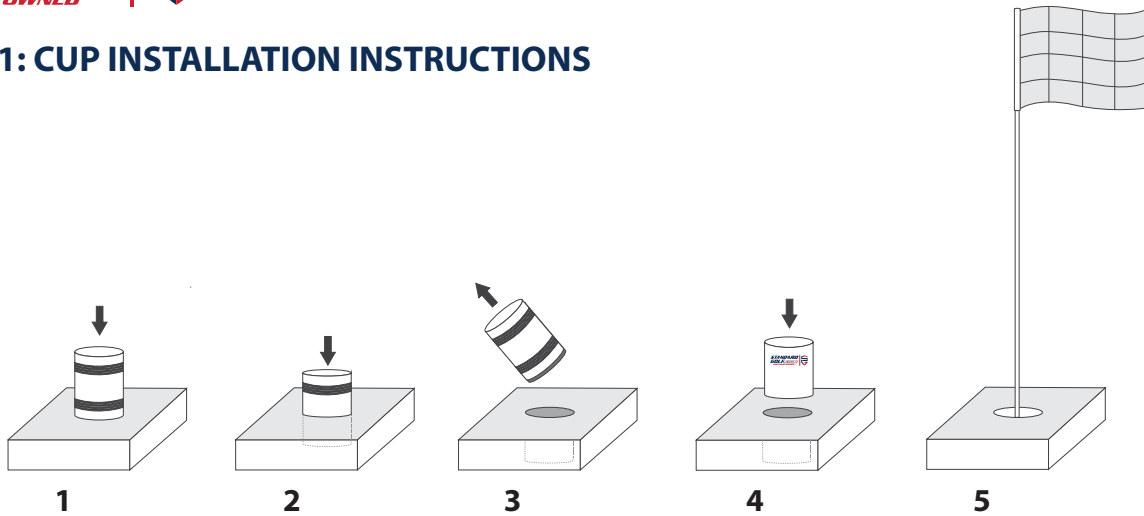

INSTRUCTIONS

In lieu of a Standard Golf Hole Cutter, follow below:


1. Use a can opener to remove top from a number 6 bean can (55 oz) and use as a template. Moisten turf where cup is to be inserted for ease of hole cutting.
2. Step on or push can into soil 2" to 3" and remove can from ground. Due to different soil conditions, you may be able to make first cut with can. Use a hand spade to finish hole.
3. Remove dirt from can and repeat process until hole is 7" in depth.
4. Insert Standard Golf cup into ground.
5. Insert Standard Golf Flagstick into cup.

TIP: Insert can until flush with the surface of the soil. Once removed, cup will fit inside hole and sit 1" below the surface.



PRO TIP: Place cup liner 1" below the surface to conform to USGA regulations. When not in use, place the included Standard Cup Cover in the hole to protect the cup.

OPTION 2: EASY MARK II INSTALLATION INSTRUCTIONS

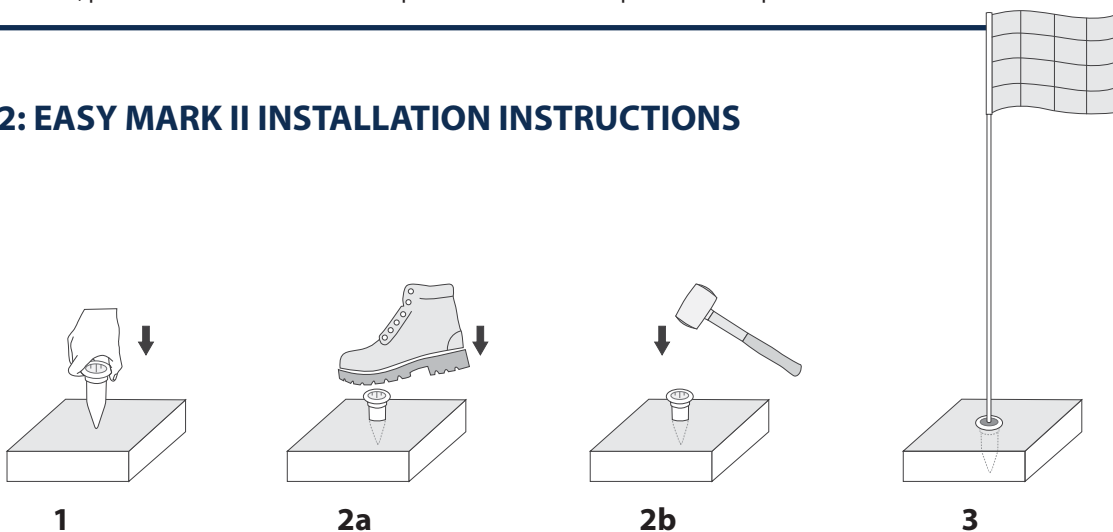

INSTRUCTIONS

1. Identify a level location to install.
2. Insert flush with top soil. Depending on soil firmness you can either:
 - a. step on or push Easy Mark II into the ground.
 - b. use mallet or similar to push Easy Mark II into ground.
2. Insert Standard Golf Flagstick into Easy Mark II.